

LUMINO

CV Driver P24-100-PH-R02

Vector

Project:	Type:
Quantity:	Location:



DAMP LOCATION IP66	24VDC CONSTANT VOLTAGE
--------------------------	------------------------------



FOR USE WITH:

- VectorFLEX
- Vector V10S
- Vector V12S
- Vector V20S
- Vector V20S KIT
- Vector V20S Superlinear
- Vector V36S
- Vector V36R
- Vector V36I

PERFORMANCE DATA

PHASE 100-1% Dimming Range


24VDC	Output Voltage	180-240VAC	Input Voltage
4.16A	Output Current	50-60Hz	Input Frequency
100W	Output Power	1.12A	Input Current(typ.)
70°C Max	Case Temp Tc	85%	Efficiency(typ.)
PF>0.65	Power Factor	40A	Inrush current (typ.)
5W	Min. Load	IP66	Protection degree

ORDER CODES : P24-100-PH-R02

DIMENSIONS

Total length of cable for each end is 200±20mm.

1.02 kg

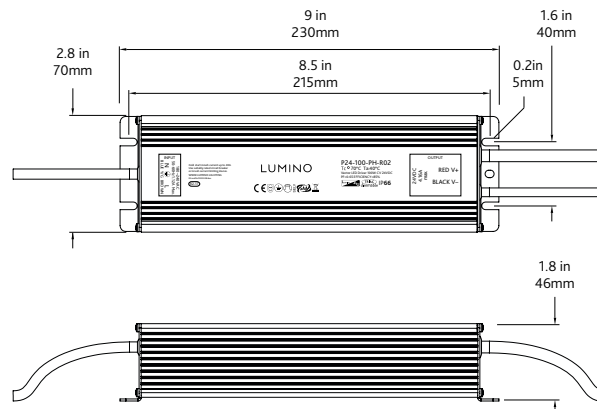

Lumino Head Office
Lumino House, Lovet Road,
Harlow Essex CM19 5TB
United Kingdom

T +44 (0) 1279 635411
F +44 (0) 1279 626101
E info@lumino.lighting

Lumino North America
One Penn Plaza,
36th floor
New York, NY 10119
USA

T (212)786-7463
E info@lumino.lighting

Find us on

