

LUMINO

SolidEDGE Joining Kit

INSTALLATION MANUAL

IM-Exx-200-R1

TECHNICAL SUPPORT

+44(0) 1279 635 411
www.lumino.lighting

LUMINO DISTRIBUTION LTD

Lumino House, Lovet Road
Harlow, Essex CM19 5TB
United Kingdom

Authorised EU Representative:
LDL LIGHTING EUROPE LIMITED
The Black Church, St Mary's Place
Dublin, D07 P4AX
Ireland

Installers must read this document and any other referenced documents in full before commencing installation work.

Failure to observe all installation guidance in this document may result in unsafe installation, cause permanent product damage and void product warranty.

This document is subject to change without notice.
Check for latest documentation with LUMINO.
Copyright © LUMINO. E&OE



SAFETY GUIDANCE

STRESS

Never stand or place weighted items on the fitting.
The fitting is not vandal resistant and has no IK rating.
Do not subject the fitting to impact forces.

FIXING SURFACES

Check that surface is appropriate for the fitting being installed and can support its weight.

MODIFYING

Other than repair and replacement, this fitting must not be sawn, drilled or otherwise modified in any way.

DAMAGES

Inspect the product and accessories. If you see any damage upon unpacking, report to LUMINO immediately and do not install the product.

QUALIFIED INSTALLER & PRECAUTIONS

Installation must be carried out by a qualified person and conducted in accordance with local regulations and applicable standards. Use appropriate PPE and tools for the installation, as well as have a sufficient number of qualified personnel to carry out the work.


REPAIR AND REPLACEMENT

If the product is not functioning, contact LUMINO to register a Service Call for factory repair or replacement. Product's light source is replaceable by the manufacturer, their service agent or a similar qualified professional. See page 3 for Ecodesign and end of life information.

COMPATIBILITY

This joining kit is suitable for use with the three SolidEDGE variants shown below. Do not use with any other products.


E13



E16




E25




INSTRUCTIONS

STEP 1

Use Allen key to loosen grub screws.

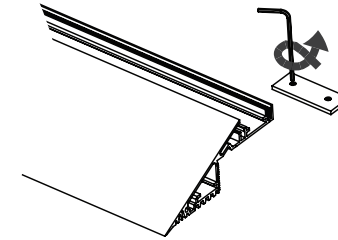


NOTE: Joining Kit is supplied as a pair of fixing plates and rods, enabling two joins to be made.




STEP 2

Slide both the fixing plate and the alignment pin into the first piece of SolidEDGE profile as shown.

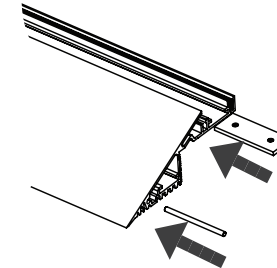

STEP 3

With both the plate and the rod half inserted, tighten grub screw,

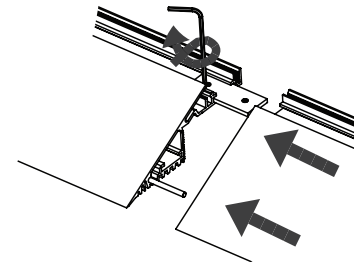

STEP 4

Carefully align the two pieces of SolidEDGE and push together, then tighten both grub screws.

