

LUMINO

STEORRA STEALTH

IP20 | IP64



Project:	Type:
Quantity:	Location:






5 YEAR WARRANTY	CE	<1% LOW LEVEL DIMMING
2 STEP 	95 CRI	2200K TO 4000K
L70B10 >60,000h	DRY LOCATION IP20	DAMP LOCATION IP64

STEORRA STEALTH is a recessed, semi-trimless downlight for fast and easy installation while giving the appearance of a plaster-in product. Fitted with a ColorCORE® Engine to provide lighting designers with a tool to creating dramatic contrasts or subtle accents using clean, pure optical beams in 12° SPOT, 20° MEDIUM and 30° FLOOD.

CCTs to provide a perfect match VECTOR linear profiles from very warm white 2200K through to cool white 4000K with identical 2-STEP CCT binning and typical ≤95Ra ColorCORE® colour rendering.

IP20 with 30° adjustable tilt or IP64 fixed downlight. Designed for void depths as shallow as 99mm. Producing ≤855lm, all versions are dimmable with 0-10V/DALI or PHASE, down to less than 1% with smooth, flicker-free dimming control.

CCT K	CRI Ra	Rf	Rg
4000	≤95	≤92	≤100
3500	≤95	≤92	≤100
3000	≤95	≤92	≤100
2700	≤95	≤92	≤100
2500	≤90	≤82	≤100
2200	≤90	≤82	≤100

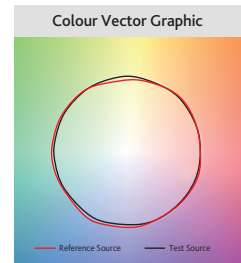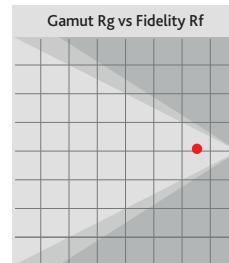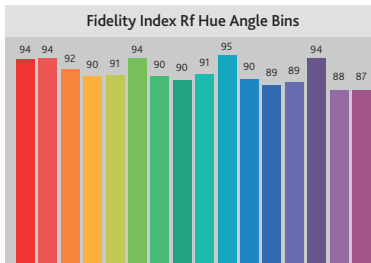

CCT K	SPOT	MEDIUM	FLOOD
4000	825lm	855lm	785lm
3500	800lm	820lm	760lm
3000	775lm	785lm	735lm
2700	750lm	760lm	715lm
2500	675lm	690lm	650lm
2200	625lm	630lm	600lm

ORDER CODES

FINISH E WHITE F BLACK	TYPE 1 TILT IP20 2 FIXED IP64	BEAM 12° SPOT 20° MEDIUM 30° FLOOD	CCT 40 4000K 35 3500K 30 3000K 27 2700K 25 2500K 22 2200K
-------------------------------------	--	--	--

S 66 K - E S 1 C 1 - 1 2 B C 3 0

All performance data including beam angle, CCT, lumen output, CRI, TM30 and W/M can vary according to factors such as, but not limited to temperature, batch, CCT, power, manufacturing tolerances and LOR.


EXAMPLE: STEORRA 66 STEALTH WHITE ROUND TILT IP20 12° COLORCORE 3000K

LUMINO


STEORRA ZERO

IP20 | IP64

DIMENSIONS

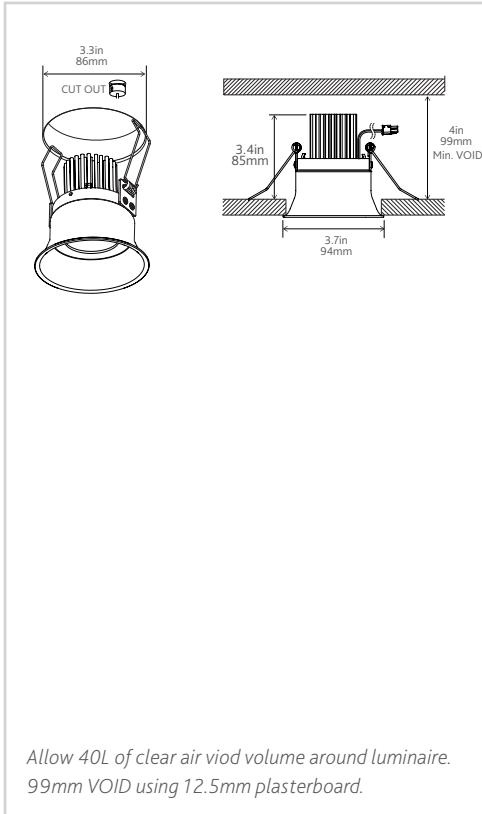


ACCESSORIES



S66A-AA050-R2
Honeycomb Anti-Glare Louvre

S66A-AA055-R2
Frosted Glass Filter




S66A-AA001-R2
Removal Tool

DIMMABLE DRIVERS


300
Max 12W
Max 300mA
Typ 38VF

P30-016
300mA Driver
Non-Dim




P30-016-PH
300mA Driver
Phase (TRIAC)
Dimmable
Dims to 10%

TRIAC
dimmable

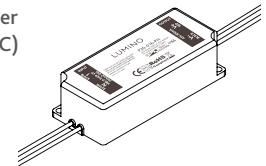


P30-016-D10
300mA Driver
0-10V
Dimmable
Dims to 1%

0-10V
dimmable



P30-020-DAL
300mA Driver
DALI
Dimmable
Dims to 1%

DALI
dimmable



LUMINO DISTRIBUTION LTD
Lumino House, Lovet Road
Harlow, Essex CM19 5TB
United Kingdom
+44 (0) 1279 635411